


board the bus

INDUSTRIAL QUALITY BOARDS FOR THE
IEEE-696/S-100 BUS

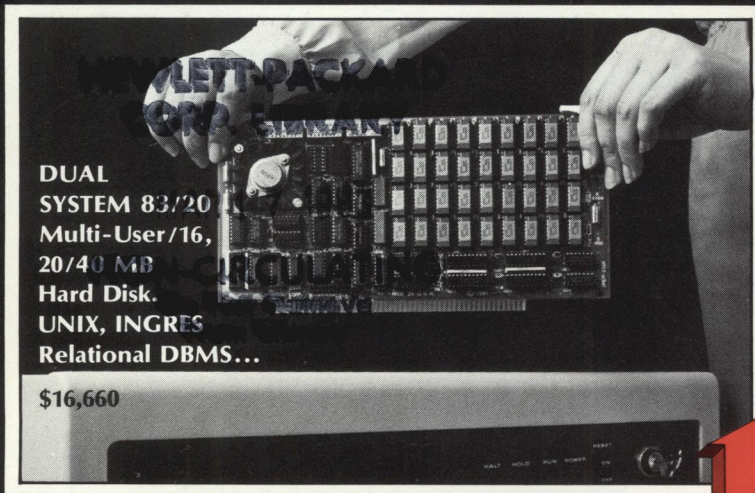

**DUAL
SYSTEM 83/20**
Multi-User/16,
20/40 MB
Hard Disk.
UNIX, INGRES
Relational DBMS...

\$16,660

CPU GROUP

CPU 68000

- MC68000 processor
- 10 MHz operation
- 16-Mbyte addressing
- Single-user

\$895

CPU 68000M

- MC68451 MMU
- Segmented memory management
- Multi-user

\$995

MEMORY GROUP

DMEM

- 256K dynamic RAM
- 24-bit addressing
- 230 ns access

\$1295

CMEM

- 8K/16K/32K CMOS
- 6 MHz for 8/16-bit
- Non-volatile with Li battery

\$695/\$595/\$495

EPROM

- 32/64K ROM
- 16-bit data paths
- 24-bit addressing

\$295

I/O GROUP

WDC-SMD

- DMA Winchester controller
- 25 ms access time
- No interleaving

\$1380

SIO4

- 4-port serial I/O
- 256 bytes of FIFO
- DMA transfers
- 24-bit memory addr.

\$695

CLK-24C

- Real time clock
- LSI CMOS chip
- Li battery backup

\$295

ANALOG GROUP

AIM-12 (A²-to-D)

- 32 S.E. channels
- 25 μ-sec conversion
- 12-bit resolution

\$695

VIC 4-20

- 4 channels
- 20 mA outputs
- 12-bit performance

\$595

AOM-12 (D-to-A)

- 12-bit ±½ L.S.B.
- 0-10V, ±5V, ±10V jumper select outputs

\$645

IEEE-
696/
S-100
BUS

DUAL

Sales representatives in most metropolitan areas.


OEM and Dealer pricing is available.

2530 San Pablo Avenue • Berkeley • CA 94702 • (415) 549-3854 • 172029 SPX

Reader Service Number 1

THE ULTIMATE IEEE/S-100 MEMORY WOULD...

- **BE NONVOLATILE**, holding data for up to eight years with the power off.
- **RUN AT 6MHZ** without wait states.
- **HAVE EXTENDED 24-BIT ADDRESSING** and bank select.
- **HAVE DYNAMICALLY MOVABLE WRITE PROTECT AREAS** to prevent accidental erasure of programs and critical data.
- **GENERATE POWER-FAIL** interrupts for orderly system shutdown & power failure recovery.

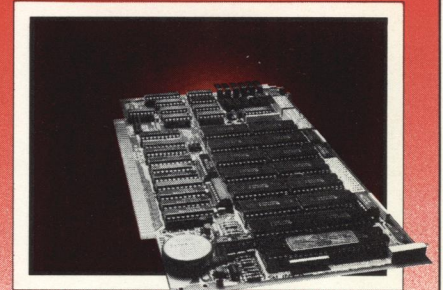

CMEM

AVAILABLE NOW FROM DUAL SYSTEMS, the CMEM memory boards combine high-speed CMOS memories with a new 5-8 year lithium battery. The CMEM offers the nonvolatility of an EPROM board while retaining the instant writability of a high-speed read/write RAM. These industrial grade boards are subjected to a 168-hour burn-in and a 1000-cycle power interruption test to insure data retention and the highest degree of reliability possible.

CMEM-32K, 32K Bytes \$695

CMEM-16K, 16K Bytes \$595

CMEM- 8K, 8K Bytes \$495

DUAL

DUAL SYSTEMS CORPORATION

2530 San Pablo Avenue • Berkeley
CA 94702 • (415) 549-3854 • 172029 SPX